

# **M.2 2280 PCIe/NVMe SSD 720 Datasheet**

**(SQF-C8Mxx-xG-EDx) (M Key)**

## CONTENTS

|                                                |           |
|------------------------------------------------|-----------|
| <b>1. Overview .....</b>                       | <b>4</b>  |
| <b>2. Features .....</b>                       | <b>5</b>  |
| <b>3. Specification Table .....</b>            | <b>6</b>  |
| <b>4. General Description .....</b>            | <b>8</b>  |
| <b>5. Pin Assignment and Description .....</b> | <b>11</b> |
| <b>6. NVMe Command List .....</b>              | <b>13</b> |
| <b>7. Identify Device Data .....</b>           | <b>14</b> |
| <b>8. SMART Attributes.....</b>                | <b>19</b> |
| <b>9. System Power Consumption .....</b>       | <b>20</b> |
| <b>10. Physical Dimension.....</b>             | <b>21</b> |
| <b>Appendix: Part Number Table .....</b>       | <b>22</b> |

## Revision History

| Rev. | Date       | History                                   |
|------|------------|-------------------------------------------|
| 0.1  | 2020/12/30 | 1. Change PN from CM8 to C8M              |
| 0.2  | 2021/1/6   | 1. Update pin assignment and descriptions |
| 0.3  | 2021/1/19  | 1. Add TBW data                           |
|      |            |                                           |

*Advantech reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Advantech is believed to be accurate and reliable. However, Advantech does not assure any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.*

*Copyright © 1983-2021 Advantech Co., Ltd. All rights reserved.*

## 1. Overview

Advantech SQFlash 720 series M.2 2280 (M Key) PCIe/NVMe SSD (Solid State Drive) delivers all the advantages of flash disk technology with PCIe Gen3 x4 interface and is fully compliant with the standard Next Generation Form Factor (NGFF) called M.2 Card Format. SQF-C8M M.2 2280 offers up to 1024GB and its performance can reach up to 1700 MB/s read and 1500 MB/s write based on Kioxia 3D TLC flash. Moreover, the power consumption of SQF-C8M M.2 2280 is much lower than traditional hard drives, making it the best embedded solution for new platforms.

## **2. Features**

### **■ PCIe Interface**

- Compliant with NVMe 1.3
- PCI Express Base 3.1
- PCIe Gen 3 x 4 lane & backward compatible to PCIe Gen 2 and Gen 1
- Support up to QD 128 with queue depth of up to 64K
- Support power management (optional)

### **■ Operating Voltage : 3.3V**

### **■ Support LDPC of ECC algorithm**

### **■ Support SMART and TRIM commands**

### **■ Temperature Ranges<sup>1</sup>**

- Commercial Temperature
  - 0°C to 70°C for operating
  - -40°C to 85°C for storage
- Industrial Temperature
  - -40°C to 85°C for operating
  - -40°C to 85°C for storage

\*Note : 1. Based on SMART Attribute (Byte index [2 :1] of PCIe-SIG standard, which measured by thermal sensor

### **■ Mechanical Specification**

- Shock : 1,500G / 0.5ms
- Vibration : 20G / 80~2,000Hz

### **■ Humidity**

- Humidity : 5% ~ 95% under 55°C

### **■ Acquired RoHS 、 WHQL 、 CE 、 FCC Certificate**

### **■ Acoustic : 0 dB**

### **■ Dimension : 80.0 mm x 22.0 mm x 3.8 mm**

### 3. Specification Table

#### ■ Performance

\* Preliminary, subject to change based on firmware migration.

|                   |        | Sequential Performance (MB/sec) |       | Random Performance (IOPS @4K) |       |
|-------------------|--------|---------------------------------|-------|-------------------------------|-------|
|                   |        | Read                            | Write | Read                          | Write |
| 3D TLC<br>(BiCS3) | 128 GB | 1,500                           | 500   | 70K                           | 100K  |
|                   | 256 GB | 1,730                           | 1,000 | 130K                          | 190K  |
|                   | 512 GB | 1,730                           | 1,560 | 200K                          | 310K  |
|                   | 1 TB   | 1,730                           | 1,560 | 200K                          | 310K  |
|                   | 2 TB   | 1,700                           | 1,300 | 305K                          | 177K  |

#### NOTES:

1. The performance was estimated based on Toshiba 3D TLC BICS3 flash.
2. Performance may differ according to flash configuration and platform.
3. The table above is for reference only. The criteria for MP (mass production) and for accepting goods shall be discussed based on different flash configuration

### ■ Endurance

JEDEC defined an endurance rating TBW (TeraByte Written), following by the equation below, for indicating the number of terabytes a SSD can be written which is a measurement of SSDs' expected lifespan, represents the amount of data written to the device.

$$TBW = [(NAND\ Endurance) \times (SSD\ Capacity)] / WAF$$

- **NAND Endurance:** Program / Erase cycle of a NAND flash.
  - SLC: 100,000 cycles
  - Ultra MLC: 30,000 cycles
  - MLC: 3,000 cycles
  - 3D TLC (BiCS3): 3,000 cycles
- **SSD Capacity:** SSD physical capacity in total of a SSD.
- **WAF:** Write Amplification Factor (WAF), as the equation shown below, is a numerical value representing the ratio between the amount of data that a SSD controller needs to write and the amount of data that the host's flash controller writes. A better WAF, which is near to 1, guarantees better endurance and lower frequency of data written to flash memory.

$$WAF = (Lifetime\ write\ to\ flash) / (Lifetime\ write\ to\ host)$$

Endurance measurement is based on JEDEC 219A client workload and verified with following workload conditions,

- PreCond%full = 100%
  - Trim commands enabled
  - Random data pattern.
- **SQFlash 720 M.2 2280 TBW**

|        | WAF | TBW            |
|--------|-----|----------------|
|        |     | 3D TLC (BiCS3) |
| 128 GB | 3.5 | 110            |
| 256 GB | 3.2 | 240            |
| 512 GB | 2.9 | 520            |
| 1 TB   | 2.7 | 1120           |
| 2 TB   | 2.5 | 2400           |

## 4. General Description

### ■ Error Correction Code (ECC)

Flash memory cells will deteriorate with use, which might generate random bit errors in the stored data. Thus, SQF-C8M 720 applies the LDPC algorithm, which can detect and correct data errors even with the latest 3D TLC technology to ensure data being read correctly, and protects data from corruption.

### ■ Wear Leveling

NAND flash devices can only undergo a limited number of program/erase cycles, when flash media is not used evenly, some blocks get updated more frequently than others and the lifetime of device would be reduced significantly. Thus, wear leveling is applied to extend the lifespan of NAND flash by evenly distributing write and erase cycles across the media.

SQFlash 720 series provides advanced wear leveling algorithm, which can efficiently spread out the flash usage through the whole flash media area. Moreover, by implementing both dynamic and static wear leveling algorithms, the life expectancy of the NAND flash is greatly improved.

### ■ Bad Block Management

Bad blocks are blocks that do not function properly or contain more invalid bits causing stored data unstable, and their reliability is not guaranteed. Blocks that are identified and marked as bad by the manufacturer are referred to as “Early Bad Blocks”. Bad blocks that are developed during the lifespan of the flash are named “Later Bad Blocks”. SQFlash 720 series implements an efficient bad block management algorithm to detect the factory-produced bad blocks and manages bad blocks that appear with use. This practice prevents data being stored into bad blocks and further improves the data reliability.

### ■ Power Loss Protection: Flush Manager

Power Loss Protection is a mechanism to prevent data loss during unexpected power failure. DRAM is a volatile memory and frequently used as temporary cache or buffer between the controller and the NAND flash to improve the SSD performance. However, one major concern of the DRAM is that it is not able to keep data during power failure. Accordingly, SQFlash SSD applies the Flush Manager technology, only when the data is fully committed to the NAND flash will the controller send acknowledgement (ACK) to the host. Such implementation can prevent false-positive performance and the risk of power cycling issues.

In addition, it is critical for a controller to shorten the time the in-flight data stays in the controller internal cache. Thus, SQFlash applies an algorithm to reduce the amount of data resides in the cache to provide a better performance. With Flush Manager, incoming data would only have a “pit stop” in the cache and then move to NAND flash directly. Also, the onboard DDR will be treated as an “organizer” to consolidate incoming data into groups before written into the flash to improve write amplification.

### ■ TRIM

TRIM is a feature which helps improve the read/write performance and speed of solid state drives (SSD). Unlike hard disk drives (HDD), SSDs are not able to overwrite existing data, so the available space gradually becomes smaller with each use. With the TRIM command, the operating system can inform the SSD so that blocks of data that are no longer in use can be removed permanently. Thus, the SSD will perform the erase action, which prevents unused data from occupying blocks at all time.

### ■ SMART

SMART, an acronym for Self-Monitoring, Analysis and Reporting Technology, is an open standard that allows a solid state drive to automatically detect its health and report potential failures. When a failure is recorded by SMART, users can choose to replace the drive to prevent unexpected outage or data loss. Moreover, SMART can inform users impending failures while there is still time to perform proactive actions, such as save data to another device.



## ■ Over-Provision

Over Provisioning refers to the preserving additional area beyond user capacity in a SSD, which is not visible to users and cannot be used by them. However, it allows a SSD controller to utilize additional space for better performance and WAF. With Over Provisioning, the performance and IOPS (Input/Output Operations per Second) are improved by providing the controller additional space to manage P/E cycles, which enhances the reliability and endurance as well. Moreover, the write amplification of the SSD becomes lower when the controller writes data to the flash.


## ■ Thermal Throttling

The purpose of thermal throttling is to prevent any components in a SSD from over-heating during read and write operations. Thermal Throttling function is for protecting the drive and reducing the possibility of read / write error due to overheat. The temperature is monitored by the thermal sensor. As the operating temperature continues to increase to threshold temperature, the Thermal Throttling mechanism is activated. At this time, the performance of the drive will be significantly decreased to avoid continuous heating. When the operating temperature falls below threshold temperature, the drive can resume to normal operation.

## ■ Advanced Device Security Features

- Advanced Encryption Standard (AES)  
An AES 256-bit encryption key is generated in the drive's security controller before the data gets stored on the NAND flash. When the controller or firmware fails, the data that is securely stored in the encryption key becomes inaccessible through the NAND flash.
- Secure Erase  
SQFlash 720 series supports standard NVMe command secure erase. Also, with internal AES encryption support, the erase process will start with resetting AES key. By doing so, existing data will be scrambled within 10ms and cannot be recovered anymore. Moreover, erase flag is set when erase function is triggered, which will ensure the whole erase process can be 100% completed. Even there's power interrupt, after power resume, erase operation will be resume right away as well.
- OPAL 2.0 support  
SQFlash 720 series supports standard OPAL 2.0 function for advance Self-Encryption Drive (SED) feature sets. Advantech provides also user friendly interface for setting disk / system bonding to prevent SSD be used in non-authorized platforms, which is called Flash Lock function.

## ■ Block Diagram

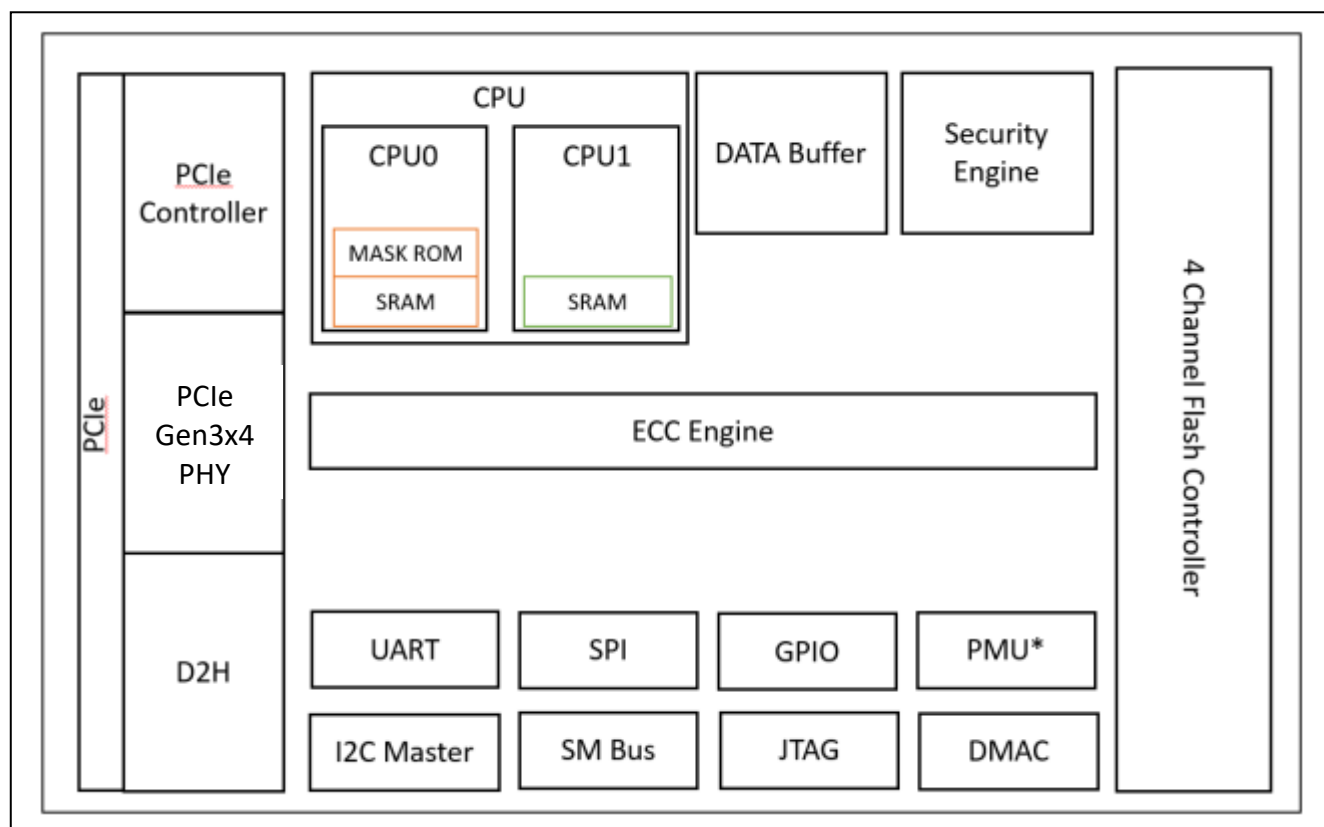

## ■ LBA value

| Density | LBA           |
|---------|---------------|
| 128 GB  | 250,069,680   |
| 256 GB  | 500,118,192   |
| 512 GB  | 1,000,215,216 |
| 1 TB    | 2,000,409,264 |
| 2 TB    | 4,000,797,360 |

### 5. Pin Assignment and Description

Below table defines the signal assignment of the internal NGFF connector for SSD usage, described in the PCI Express M.2 Specification version 1.1 of the PCI-SIG.

| Pin No. | PCIe Pin               | Description                                                                                                                                                      |
|---------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | GND                    | Ground                                                                                                                                                           |
| 2       | 3.3V                   | 3.3V source                                                                                                                                                      |
| 3       | GND                    | Ground                                                                                                                                                           |
| 4       | 3.3V                   | 3.3V source                                                                                                                                                      |
| 5       | PETn3                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 6       | NC                     | No connect                                                                                                                                                       |
| 7       | PETp3                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 8       | NC                     | No connect                                                                                                                                                       |
| 9       | GND                    | Ground                                                                                                                                                           |
| 10      | LED1#                  | Open drain, active low signal. These signals are used to allow the add-in card to provide status indicators via LED devices that will be provided by the system. |
| 11      | PERn3                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 12      | 3.3V                   | 3.3V source                                                                                                                                                      |
| 13      | PERp3                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 14      | 3.3V                   | 3.3V source                                                                                                                                                      |
| 15      | GND                    | Ground                                                                                                                                                           |
| 16      | 3.3V                   | 3.3V source                                                                                                                                                      |
| 17      | PETn2                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 18      | 3.3V                   | 3.3V source                                                                                                                                                      |
| 19      | PETp2                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 20      | NC                     | No connect                                                                                                                                                       |
| 21      | GND                    | Ground                                                                                                                                                           |
| 22      | NC                     | No connect                                                                                                                                                       |
| 23      | PERn2                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 24      | NC                     | No connect                                                                                                                                                       |
| 25      | PERp2                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 26      | NC                     | No connect                                                                                                                                                       |
| 27      | GND                    | Ground                                                                                                                                                           |
| 28      | NC                     | No connect                                                                                                                                                       |
| 29      | PETn1                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 30      | NC                     | No connect                                                                                                                                                       |
| 31      | PETp1                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 32      | NC                     | No connect                                                                                                                                                       |
| 33      | GND                    | Ground                                                                                                                                                           |
| 34      | NC                     | No connect                                                                                                                                                       |
| 35      | PERn1                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 36      | NC                     | No connect                                                                                                                                                       |
| 37      | PERp1                  | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 38      | NC                     | No connect                                                                                                                                                       |
| 39      | GND                    | Ground                                                                                                                                                           |
| 40      | SMB_CLK (I/O)(0/1.8V)  | SMBus Clock; Open Drain with pull-up on platform                                                                                                                 |
| 41      | PETn0                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 42      | SMB_DATA (I/O)(0/1.8V) | SMBus Data; Open Drain with pull-up on platform                                                                                                                  |
| 43      | PETp0                  | PCIe TX Differential signal defined by the PCI Express M.2 spec                                                                                                  |
| 44      | ALERT#(O) (0/1.8V)     | Alert notification to master; Open Drain with pull-up on platform; Active low.                                                                                   |
| 45      | GND                    | Ground                                                                                                                                                           |
| 46      | NC                     | No connect                                                                                                                                                       |

Specifications subject to change without notice, contact your sales representatives for the most update information.

|    |                           |                                                                                                                                            |
|----|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 47 | PERn0                     | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                            |
| 48 | NC                        | No connect                                                                                                                                 |
| 49 | PERp0                     | PCIe RX Differential signal defined by the PCI Express M.2 spec                                                                            |
| 50 | PERST#(I)(0/3.3V)         | PE-Reset is a functional reset to the card as defined by the PCIe Mini CEM specification.                                                  |
| 51 | GND                       | Ground                                                                                                                                     |
| 52 | CLKREQ#(I/O)(0/3.3V)      | Clock Request is a reference clock request signal as defined by the PCIe Mini CEM specification; Also used by L1 PM Sub-states.            |
| 53 | REFCLKn                   | PCIe Reference Clock signals (100 MHz) defined by the PCI Express M.2 spec.                                                                |
| 54 | PEWAKE#(I/O)(0/3.3V)      | PCIe PME Wake.<br>Open Drain with pull up on platform; Active Low.                                                                         |
| 55 | REFCLKp                   | PCIe Reference Clock signals (100 MHz) defined by the PCI Express M.2 spec.                                                                |
| 56 | Reserved for MFG DATA     | Manufacturing Data line. Used for SSD manufacturing only.<br>Not used in normal operation.<br>Pins should be left N/C in platform Socket.  |
| 57 | GND                       | Ground                                                                                                                                     |
| 58 | Reserved for MFG CLOCK    | Manufacturing Clock line. Used for SSD manufacturing only.<br>Not used in normal operation.<br>Pins should be left N/C in platform Socket. |
| 59 | Module Key M              | Module Key                                                                                                                                 |
| 60 | Module Key M              |                                                                                                                                            |
| 61 | Module Key M              |                                                                                                                                            |
| 62 | Module Key M              |                                                                                                                                            |
| 63 | Module Key M              |                                                                                                                                            |
| 64 | Module Key M              |                                                                                                                                            |
| 65 | Module Key M              |                                                                                                                                            |
| 66 | Module Key M              |                                                                                                                                            |
| 67 | NC                        | No connect                                                                                                                                 |
| 68 | SUSCLK(32KHz) (I)(0/3.3V) | 32.768 kHz clock supply input that is provided by the platform chipset to reduce power and cost for the module.                            |
| 69 | NC                        | No connect                                                                                                                                 |
| 70 | 3.3V                      | 3.3V source                                                                                                                                |
| 71 | GND                       | Ground                                                                                                                                     |
| 72 | 3.3V                      | 3.3V source                                                                                                                                |
| 73 | GND                       | Ground                                                                                                                                     |
| 74 | 3.3V                      | 3.3V source                                                                                                                                |
| 75 | GND                       | Ground                                                                                                                                     |

## 6. NVMe Command List

### ■ Admin commands

| Opcode                          | Command Description         |
|---------------------------------|-----------------------------|
| 00h                             | Delete I/O Submission Queue |
| 01h                             | Create I/O Submission Queue |
| 02h                             | Get Log Page                |
| 04h                             | Delete I/O Completion Queue |
| 05h                             | Create I/O Completion Queue |
| 06h                             | Identify                    |
| 08h                             | Abort                       |
| 09h                             | Set Features                |
| 0Ah                             | Get Features                |
| 0Ch                             | Asynchronous Event Request  |
| 0Dh                             | Namespace Management        |
| 10h                             | Firmware Activate           |
| 11h                             | Firmware Image Download     |
| 14h                             | Device Self-test            |
| 15h                             | Namespace Attachment        |
| 18h                             | Keep Alive                  |
| <b>NVM Command Set Specific</b> |                             |
| 80h                             | Format NVM                  |
| 81h                             | Security Send               |
| 82h                             | Security Receive            |
| 84h                             | Sanitize                    |

### ■ NVM commands

| Opcode | Command Description |
|--------|---------------------|
| 00h    | Flush               |
| 01h    | Write               |
| 02h    | Read                |
| 04h    | Write Uncorrectable |
| 05h    | Compare             |
| 08h    | Write Zeroes        |
| 09h    | Dataset Management  |

## 7. Identify Device Data

The Identify Device Data enables Host to receive parameter information from the device. The parameter words in the buffer have the arrangement and meanings defined in below table. All reserve bits or words are zero

### ■ Identify Controller Data Structure

| Bytes   | O/M | Description                                                         | Default Value        |
|---------|-----|---------------------------------------------------------------------|----------------------|
| 01:00   | M   | PCI Vendor ID (VID)                                                 | 0x1987               |
| 03:02   | M   | PCI Subsystem Vendor ID (SSVID)                                     | 0x1987               |
| 23:04   | M   | Serial Number (SN)                                                  | SN                   |
| 63:24   | M   | Model Number (MN)                                                   | Model Number         |
| 71:64   | M   | Firmware Revision (FR)                                              | FW Name              |
| 72      | M   | Recommended Arbitration Burst (RAB)                                 | 0x01                 |
| 75:73   | M   | IEEE OUI Identifier (IEEE)                                          | Assigned by IEEE/RAC |
| 76      | O   | Controller Multi-Path I/O and Namespace Sharing Capabilities (CMIC) | 0x00                 |
| 77      | M   | Maximum Data Transfer Size (MDTS)                                   | 0x09                 |
| 79:78   | M   | Controller ID (CNTLID)                                              | 0x0000               |
| 83:80   | M   | Version (VER)                                                       | 0x00010300           |
| 87:84   | M   | RTD3 Resume Latency (RTD3R)                                         | 0x124F80             |
| 91:88   | M   | RTD3 Entry Latency (RTD3E)                                          | 0x2191C0             |
| 95:92   | M   | Optional Asynchronous Events Supported (OAES)                       | 0x00000100           |
| 99:96   | M   | Controller Attributes (CTRATT)                                      | 0x00000000           |
| 111:100 | -   | Reserved                                                            | 0x00                 |
| 127:112 | O   | FRU Globally Unique Identifier (FGUID)                              | 0x00                 |
| 239:128 | -   | Reserved                                                            | 0x00                 |
| 255:240 | -   | Refer to the NVMe Management Interface Specification for definition | 0                    |
| 257:256 | M   | Optional Admin Command Support (OACS)                               | 0x001F               |
| 258     | M   | Abort Command Limit (ACL)                                           | 0x00                 |
| 259     | M   | Asynchronous Event Request Limit (AERL)                             | 0x03                 |
| 260     | M   | Firmware Updates (FRMW)                                             | 0x12                 |
| 261     | M   | Log Page Attributes (LPA)                                           | 0x0E                 |
| 262     | M   | Error Log Page Entries (ELPE)                                       | 0x0F                 |
| 263     | M   | Number of Power States Support (NPSS)                               | 0x04                 |
| 264     | M   | Admin Vendor Specific Command Configuration (AVSCC)                 | 0x01                 |
| 265     | O   | Autonomous Power State Transition Attributes                        | 0x01                 |

Specifications subject to change without notice, contact your sales representatives for the most update information.

|                                   |   |                                                       |                                                |
|-----------------------------------|---|-------------------------------------------------------|------------------------------------------------|
|                                   |   | (APSTA)                                               |                                                |
| 267:266                           | M | Warning Composite Temperature Threshold (WCTEMP)      | 0x155                                          |
| 269:268                           | M | Critical Composite Temperature Threshold (CCTEMP)     | 0x157                                          |
| 271:270                           | O | Maximum Time for Firmware Activation (MTFA)           | 0x2710                                         |
| 275:272                           | O | Host Memory Buffer Preferred Size (HMPRE)             | 0x00000000(HMB off)Depend on Disk Size(HMB on) |
| 279:276                           | O | Host Memory Buffer Minimum Size (HMMIN)               | 0x00000000(HMB off)Depend on Disk Size(HMB on) |
| 295:280                           | O | Total NVM Capacity (TNVMCAP)                          | non-zero                                       |
| 311:296                           | O | Unallocated NVM Capacity (UNVMCAP)                    | 0                                              |
| 315:312                           | O | Replay Protected Memory Block Support (RPMBS)         | 0x00000000                                     |
| 317:316                           | O | Extended Device Self-test Time (EDSTT)                | 0x001E                                         |
| 318                               | O | Device Self-test Options (DSTO)                       | 0x01                                           |
| 319                               | M | Firmware Update Granularity (FWUG)                    | 0x4                                            |
| 321:320                           | M | Keep Alive Support (KAS)                              | 0x0001                                         |
| 323:322                           | O | Host Controlled Thermal Management Attributes (HCTMA) | 1                                              |
| 325:324                           | O | Minimum Thermal Management Temperature (MNTMT)        | 0x111                                          |
| 327:326                           | O | Maximum Thermal Management Temperature (MXTMT)        | 0x157                                          |
| 331:328                           | O | Sanitize Capabilities (SANICAP)                       | 0x00000006                                     |
| 511:316                           | - | Reserved                                              | 0                                              |
| <b>NVM Command Set Attributes</b> |   |                                                       |                                                |
| 512                               | M | Submission Queue Entry Size (SQES)                    | 0x66                                           |
| 513                               | M | Completion Queue Entry Size (CQES)                    | 0x44                                           |
| 515:514                           | M | Maximum Outstanding Commands (MAXCMD)                 | 0                                              |
| 519:516                           | M | Number of Namespaces (NN)                             | 0x000000001                                    |
| 521:520                           | M | Optional NVM Command Support (ONCS)                   | 0x005F                                         |
| 523:522                           | M | Fused Operation Support (FUSES)                       | 0                                              |
| 524                               | M | Format NVM Attributes (FNA)                           | 0x01                                           |
| 525                               | M | Volatile Write Cache (VWC)                            | 0x01                                           |
| 527:526                           | M | Atomic Write Unit Normal                              | 0x00FF                                         |

Specifications subject to change without notice, contact your sales representatives for the most update information.

|                                  |   |                                                   |                                                     |
|----------------------------------|---|---------------------------------------------------|-----------------------------------------------------|
|                                  |   | (AWUN)                                            |                                                     |
| 529:528                          | M | Atomic Write Unit Power Fail (AWUPF)              | 0x0000                                              |
| 530                              | M | NVM Vendor Specific Command Configuration (NVSCC) | 0x01                                                |
| 531                              | M | Reserved                                          | 0x00                                                |
| 533:532                          | O | Atomic Compare & Write Unit (ACWU)                | 0x0000                                              |
| 535:534                          | M | Reserved                                          | 0x0000                                              |
| 539:536                          | O | SGL Support (SGLS)                                | 0x0000000000                                        |
| 767:540                          | M | Reserved                                          | 0x00                                                |
| <b>IO Command Set Attributes</b> |   |                                                   |                                                     |
| 2047:704                         | M | Reserved                                          | 0                                                   |
| 2079:2048                        | M | Power State 0 Descriptor                          | 0x0081031600401C52000000000000002580000025800000316 |
| 2111:2080                        | O | Power State 1 Descriptor                          | 0x0081031600401C52010101010000002580000025800000316 |
| 2143:2112                        | O | Power State 2 Descriptor                          | 0x0081031600401C52020202020000002580000025800000316 |
| 2175:2144                        | O | Power State 3 Descriptor                          | 0x0081031600401C52030303030000003E8000003E8030003E8 |
| 2207:2176                        | O | Power State 4 Descriptor                          | 0x0081031600401C5224040404000186A00000138803000032  |
| ...                              | - | (N/A)                                             | 0                                                   |
| 3071:3040                        | O | Power State 31 Descriptor                         | 0                                                   |
| <b>Vendor Specific</b>           |   |                                                   |                                                     |
| 4095:3072                        | O | Vendor Specific (VS)                              | Vendor Reserved                                     |



### ■ Identify Namespace Data Structure & NVM Command Set Specific

| Bytes    | Description                                                        |
|----------|--------------------------------------------------------------------|
| 7:0      | Namespace Size (NSZE)                                              |
| 15:8     | Namespace Capacity (NCAP)                                          |
| 23:16    | Namespace Utilization (NUSE)                                       |
| 24       | Namespace Features (NSFEAT)                                        |
| 25       | Number of LBA Formats (NLBAF)                                      |
| 26       | Formatted LBA Size (FLBAS)                                         |
| 27       | Metadata Capabilities (MC)                                         |
| 28       | End-to-end Data Protection Capabilities (DPC)                      |
| 29       | End-to-end Data Protection Type Settings (DPS)                     |
| 30       | Namespace Multi-path I/O and Namespace Sharing Capabilities (NMIC) |
| 31       | Reservation Capabilities (RESCAP)                                  |
| 32       | Format Progress Indicator (FPI)                                    |
| 33       | Deallocate Logical Block Features (DLFEAT)                         |
| 35:34    | Namespace Atomic Write Unit Normal (NAWUN)                         |
| 37:36    | Namespace Atomic Write Unit Power Fail (NAWUPF)                    |
| 39:38    | Namespace Atomic Compare & Write Unit (NAWWU)                      |
| 41:40    | Namespace Atomic Boundary Size Normal (NABSN)                      |
| 43:42    | Namespace Atomic Boundary Offset (NABO)                            |
| 45:44    | Namespace Atomic Boundary Size Power Fail (NABSPF)                 |
| 47:46    | Namespace Atomic Optimal IO Boundary (NOIOB)                       |
| 63:48    | NVM Capacity (NVMCAP)                                              |
| 103:64   | Reserved                                                           |
| 119:104  | Namespace Globally Unique Identifier (NGUID)                       |
| 127:120  | IEEE Extended Unique Identifier (EUI64)                            |
| 131:128  | LBA Format 0 Support (LBAF0)                                       |
| 135:132  | LBA Format 1 Support (LBAF1)                                       |
| 139:136  | LBA Format 2 Support (LBAF2)                                       |
| 143:140  | LBA Format 3 Support (LBAF3)                                       |
| 147:144  | LBA Format 4 Support (LBAF4)                                       |
| 151:148  | LBA Format 5 Support (LBAF5)                                       |
| 155:152  | LBA Format 6 Support (LBAF6)                                       |
| 159:156  | LBA Format 7 Support (LBAF7)                                       |
| 163:160  | LBA Format 8 Support (LBAF8)                                       |
| 167:164  | LBA Format 9 Support (LBAF9)                                       |
| 171:168  | LBA Format 10 Support (LBAF10)                                     |
| 175:172  | LBA Format 11 Support (LBAF11)                                     |
| 179:176  | LBA Format 12 Support (LBAF12)                                     |
| 183:180  | LBA Format 13 Support (LBAF13)                                     |
| 187:184  | LBA Format 14 Support (LBAF14)                                     |
| 191:188  | LBA Format 15 Support (LBAF15)                                     |
| 383:192  | Reserved                                                           |
| 4095:384 | Vendor Specific (VS)                                               |

## ■ List of Device Identification for Each Capacity

| Capacity<br>(GB) | Byte[7:0]:<br>Namespace Size (NSZE) |
|------------------|-------------------------------------|
| 128              | EE7C2B0h                            |
| 256              | 1DCF32B0h                           |
| 512              | 3B9E12B0h                           |
| 1024             | 773BD2B0h                           |
| 2048             | EE7752B0h                           |

## 8. SMART Attributes

| Bytes Index | Bytes | Description                             |
|-------------|-------|-----------------------------------------|
| [0]         | 1     | Critical Warning                        |
| [2:1]       | 2     | Composite Temperature                   |
| [3]         | 1     | Available Spare                         |
| [4]         | 1     | Available Spare Threshold               |
| [5]         | 1     | Percentage Used                         |
| [31:6]      | 26    | Reserved                                |
| [47:32]     | 16    | Data Units Read                         |
| [63:48]     | 16    | Data Units Written                      |
| [79:64]     | 16    | Host Read Commands                      |
| [95:80]     | 16    | Host Write Commands                     |
| [111:96]    | 16    | Controller Busy Time                    |
| [127:112]   | 16    | Power Cycles                            |
| [143:128]   | 16    | Power On Hours                          |
| [159:144]   | 16    | Unsafe Shutdowns                        |
| [175:160]   | 16    | Media and Data Integrity Errors         |
| [191:176]   | 16    | Number of Error Information Log Entries |
| [195:192]   | 4     | Warning Composite Temperature Time      |
| [199:196]   | 4     | Critical Composite Temperature Time     |
| [201:200]   | 2     | Temperature Sensor 1                    |
| [203:202]   | 2     | Temperature Sensor 2                    |
| [205:204]   | 2     | Temperature Sensor 3                    |
| [207:206]   | 2     | Temperature Sensor 4                    |

## 9. System Power Consumption

### ■ Supply Voltage

| Parameter         | Rating |
|-------------------|--------|
| Operating Voltage | 3.3V   |


### ■ Power Consumption

| (mW)              |        | Read  | Write |
|-------------------|--------|-------|-------|
| 3D TLC<br>(BiCS3) | 128 GB | 3,000 | 2,000 |
|                   | 256 GB | 3,300 | 2,600 |
|                   | 512 GB | 3,500 | 3,200 |
|                   | 1 TB   | 3,800 | 3,800 |
|                   | 2 TB   | 4,100 | 4,500 |

1. Use CrystalDiskMark 6.0.0 with the setting of 1GB. Sequentially read and write the disk for 5 times, and measure power consumption during sequential Read [1/5]~[5/5] or sequential Write [1/5]~[5/5]
2. Power Consumption may differ according to flash configuration and platform.
3. The measured power voltage is 3.3V.

### 10. Physical Dimension

M.2 2280 (M key) PCIe/NVMe SSD (Unit: mm)

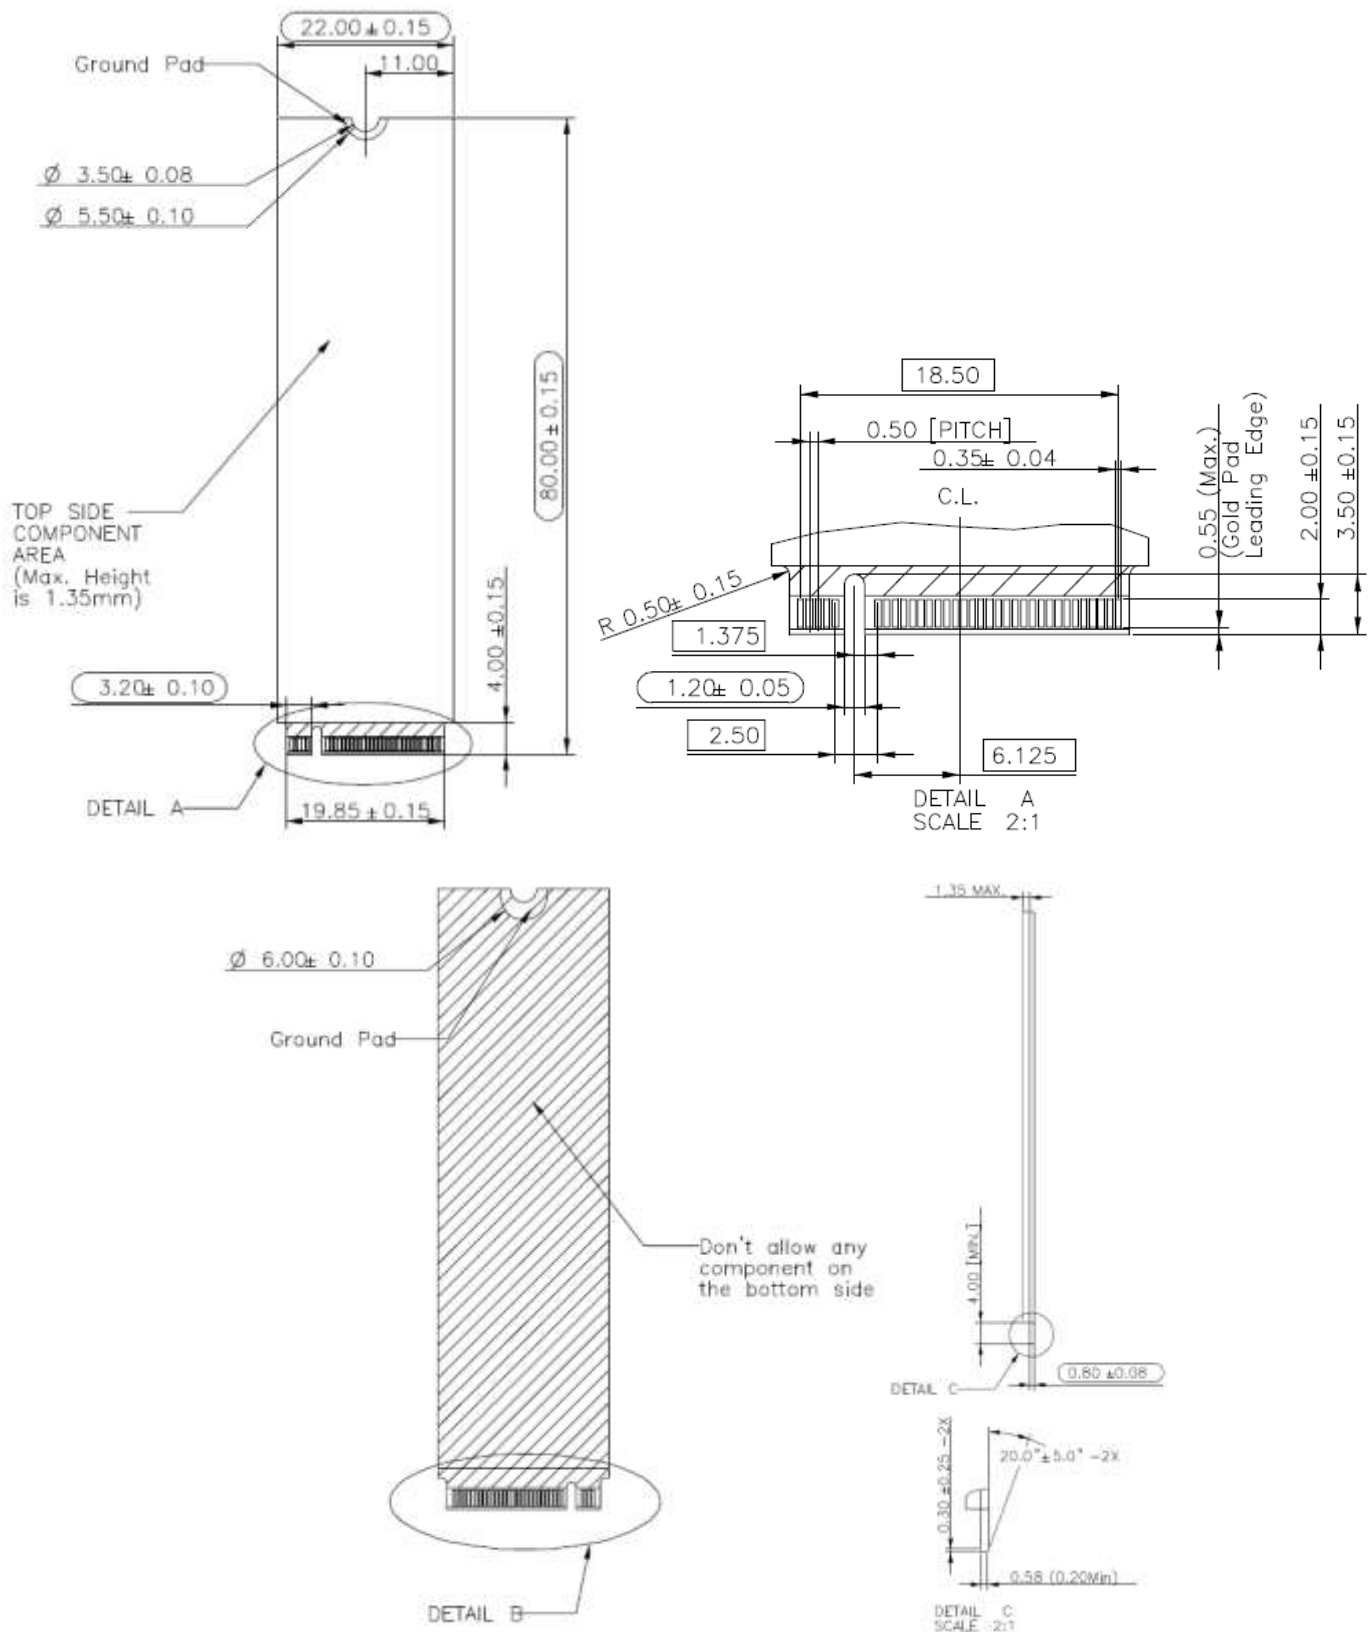

### Appendix: Part Number Table

| Product                                                         | Advantech PN       |
|-----------------------------------------------------------------|--------------------|
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 128G 3D TLC BiCS3 (0~70°C)   | SQF-C8MV2-128G-EDC |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 256G 3D TLC BiCS3 (0~70°C)   | SQF-C8MV2-256G-EDC |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 512G 3D TLC BiCS3 (0~70°C)   | SQF-C8MV4-512G-EDC |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 1T 3D TLC BiCS3 (0~70°C)     | SQF-C8MV4-1T-EDC   |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 2T 3D TLC BiCS3 (0~70°C)     | SQF-C8MV4-2T-EDC   |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 128G 3D TLC BiCS3 (-40~85°C) | SQF-C8MV2-128G-EDE |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 256G 3D TLC BiCS3 (-40~85°C) | SQF-C8MV2-256G-EDE |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 512G 3D TLC BiCS3 (-40~85°C) | SQF-C8MV4-512G-EDE |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 1T 3D TLC BiCS3 (-40~85°C)   | SQF-C8MV4-1T-EDE   |
| SQF 720 PCIe/NVMe M.2 2280 (M Key) 2T 3D TLC BiCS3 (-40~85°C)   | SQF-C8MV4-2T-EDE   |